


TRIME model X-CHAIN connection

How to connect the model X-CHAIN and use for the best the connection possibilities

1 – Connect the X-CHAIN 4x160W LED to a standard X-START 4x320W LED through the Auxiliary outlet.

Model X-START LED with 2-Cylinder and 3,0kVA alternator, it has an Auxiliary plug of 1,0kVA 16A Blue Plug.

You can connect no. 1 unit X-CHAIN 4x160W LED

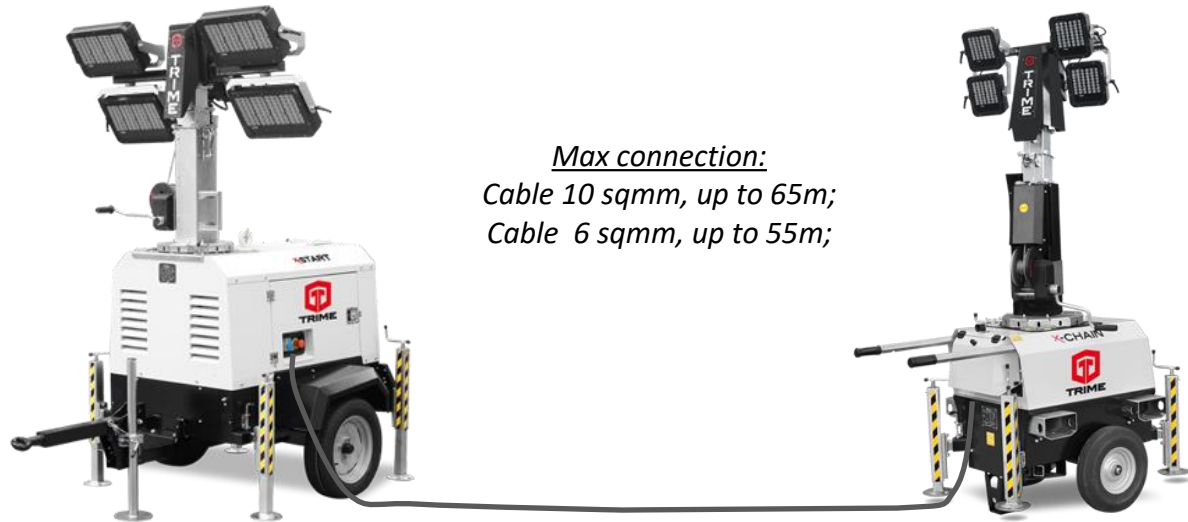

Max connection:

*Cable 10 sqmm, up to 65m;
Cable 6 sqmm, up to 55m;*

TRIME model X-CHAIN connection

2 – Connect the X-CHAIN 4x160W LED to Power Generators



GENERATOR: 5kVA
1-ph 230V

Max connection in every single section:
Cable 10 sqmm, up to 55m;
Cable 6 sqmm, up to 45m;

MAX connection to 5kVA Gen: no. 5 units X-CHAIN 4x160W LED



GENERATOR: 10kVA
1-ph 230V

Max connection in every single section:
Cable 10 sqmm, up to 25m;
Cable 6 sqmm, up to 15m;

MAX connection to 10kVA Gen: no. 10 units X-CHAIN 4x160W LED
(only with 32A Plugs and Sockets)