

Ladder fit for vertical suspension, for working on transmission towers. Aluminium alloy construction, TIG welded, in one length or more separated sections to facilitate the transport. Hook complete with steel safety cable.

C167.AS ladder with one guide for antifall device type DA1


C167.AD ladder with two guides for antifall devices type DA1

Working Capacity: 300 daN

OPTIONAL

DA1 Antifall device complete with fall absorber, nylon tape and carabiner (part 'A').


AGM Wider hook opening (300 mm).

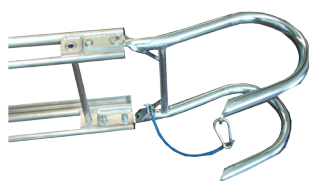


wider hook
type AGM



antifall device
type DA1

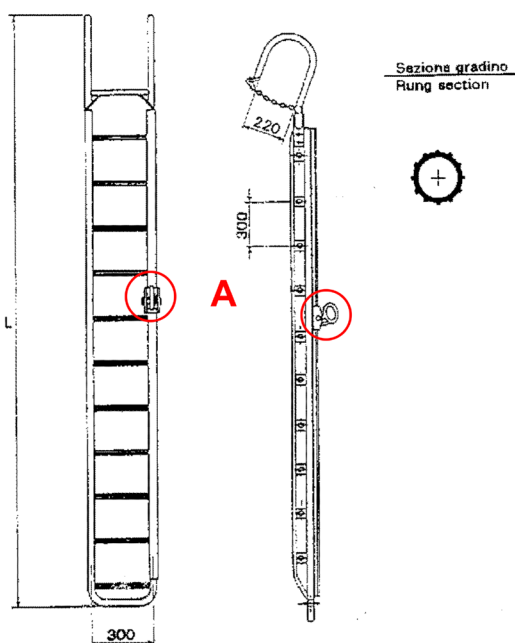

version AS
with single antifall device

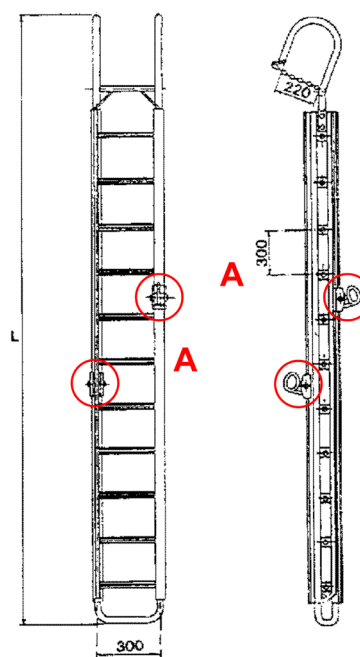

version AD
with double antifall device

Version AS	Version AD	Total length (L) m	Sections No.	Weight (ver. AS) kg	Weight (ver. AD) kg
C167.AS.251	C167.AD.251	2,5	1	9,5	11
C167.AS.351 ⁽¹⁾	C167.AD.351 ⁽¹⁾	3,5	1	12,5	15
C167.AS.451 ⁽¹⁾	C167.AD.451 ⁽¹⁾	4,5	1	15	18
C167.AS.501	C167.AD.501	5	1	18	21
C167.AS.601 ⁽¹⁾	C167.AD.601 ⁽¹⁾	6	1	19,5	23
C167.AS.602 ⁽¹⁾	C167.AD.602 ⁽¹⁾	6 (4+2)	2	21	24
C167.AS.802	C167.AD.802	8 (4+4)	2	30	35

⁽¹⁾ standard length