

C108.A



Galvanised steel cable roller.

FEATURES

Max load	180 kg
Max cable	Ø 120 mm
Roller	Ø 70/110 x 185 mm
Dimensions	300 x 240 x 250 mm
Weight	4,1 kg

C108.A1




Heavy version with shielded bearings.

FEATURES

Max load	400 kg
Max cable	Ø 200 mm
Roller	Ø 80/130 x 280 mm
Dimensions	300 x 300 x 260 mm
Weight	7,1 kg

C108.B

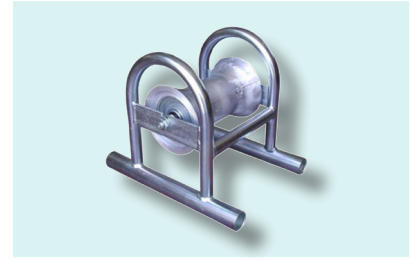

Aluminium cable roller with galvanised steel base.

FEATURES

Max load	200 kg
Max cable	Ø 120 mm
Roller	Ø 75/115 x 175 mm
Dimensions	300 x 240 x 250 mm
Weight	4,5 kg

C108.C




Straight cable roller with 3 aluminium rollers.

FEATURES

Max load	200 kg
Max cable	Ø 150 mm
Roller	Ø 50/60 x 100 mm
Dimensions	250 x 250 x 250 mm
Weight	4,9 kg

C108.E

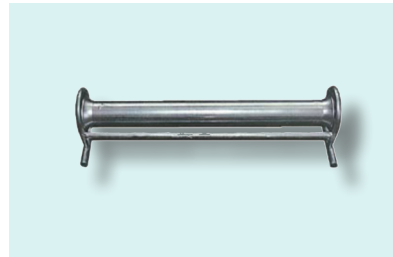


Galvanised horizontal cable roller.

FEATURES

Max load	400 kg
Max cable	Ø 120 mm
Roller	Ø 75/110 x 800 mm
Dimensions	850 x 250 x 250 mm
Weight	13 kg

C108.E1

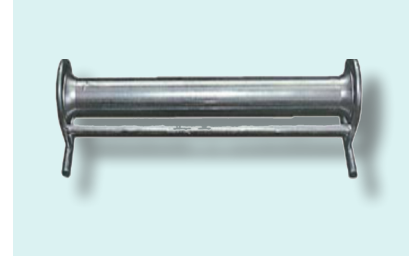

Heavy version shielded bearings.

FEATURES

Max load	1000 kg
Roller	Ø 80 x 950 mm
Dimensions	1000 x 250 x 250 mm
Weight	22 kg

C108.F



Galvanised cable guiding run-off frame.

FEATURES

Max load	300 kg
Roller	Ø 35 x 620 mm
Dimensions	1050 x 470 x 520 mm
Weight	14 kg

C108.F1



Heavy version with shielded bearings.

FEATURES

Max load	1000 kg
Roller	Ø 80 x 700 mm
Dimensions	1200 x 600 x 450 mm
Weight	28 kg

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.