


## C27.11



Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 5-28 mm  
 Maximum safety load: 20 kN  
 Jaws length: 120 mm  
 Weight: 1,9 kg  
 Dimensions: 320 x 180 mm


## C30.11

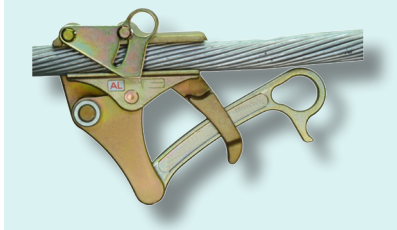

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 18-35 mm  
 Maximum safety load: 30 kN  
 Jaws length: 120 mm  
 Weight: 2,4 kg  
 Dimensions: 320 x 180 mm


## C32.10

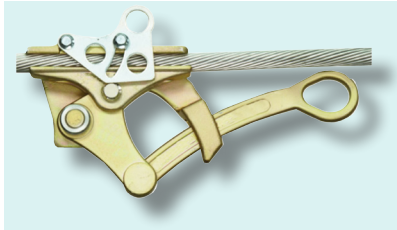

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 18-36 mm  
 Maximum safety load: 50 kN  
 Jaws length: 180 mm  
 Weight: 4,7 kg  
 Dimensions: 380 x 200 mm

## C33.10

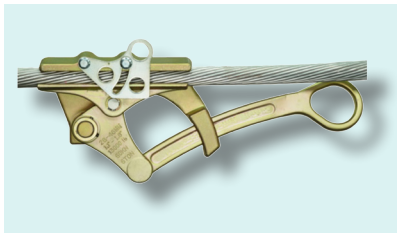

Self-gripping clamps fit for:

- Conductor ACSR, AAAC, ACSS and copper cable
- Diameter: Ø 28-46 mm  
 Maximum safety load: 60 kN  
 Jaws length: 220 mm  
 Weight: 7,0 kg  
 Dimensions: 420 x 220 mm

## 3105.1



Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 8-35,2 mm
  - steel conductor and ground wire: 8-22 mm
  - jaws length: 272 mm
  - steel rope: 8-24 mm
- Interchangeable liners (type G05) conductor diameter to be confirmed.  
 Maximum safety load: 75 kN  
 Minimum breaking load: 225 kN  
 Weight: 15 kg

## 3112



Self-gripping clamps fit for:

- Ground wires with optical fiber (OPGW) with external diameter 6-23 mm
  - Interchangeable liners (type G12TA)
- Maximum safety load: 49 kN  
 Minimum breaking load: 180 kN  
 Weight: 7 kg  
**G12TA** Interchangeable liners in adiprene and aluminium, on demand according to OPGW diameter

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.