


# C167

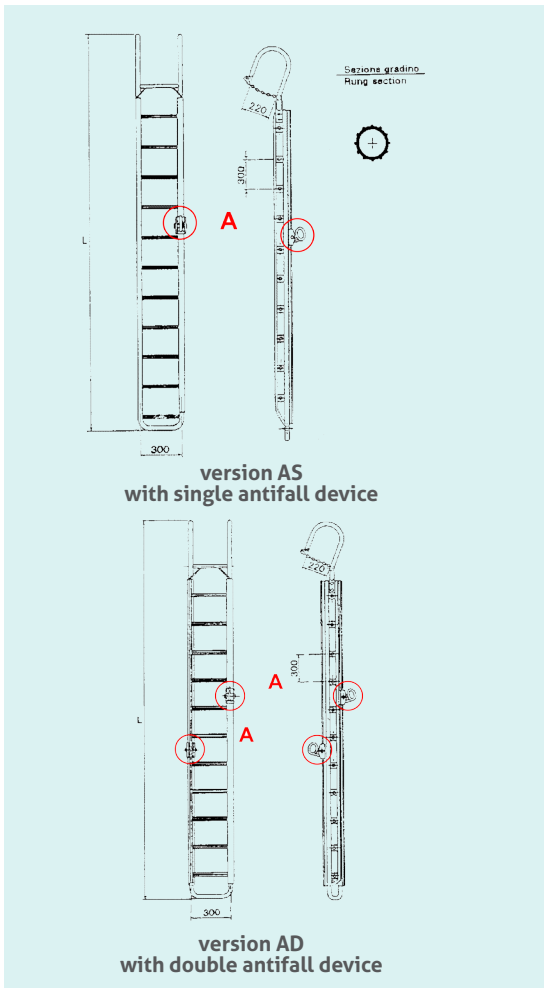

Ladder fit for vertical suspension, for working on transmission towers.  
 Aluminium alloy construction, TIG welded, in one length or more separated sections to facilitate the transport. Hook complete with steel safety cable.  
**C167.AS** ladder with one guide for antifall device type DA1  
**C167.SD** ladder with two guides for antifall devices type DA1

Working Capacity: 300 daN

**OPTIONAL DEVICES**

- DA1 Antifall device complete with fall absorber, nylon tape and carabiner (part'A').
- AGM Wider hook opening (300 mm).



antifall device type DA1

Version AS	Version AD	Total length (L)	Sections	Weight (ver. AS)	Weight (ver. AD)
		m	No.	kg	kg
C167.AS.251	C167.AD.251	2,5	1	9,5	11
C167.AS.351 <sup>(2)</sup>	C167.AD.351 <sup>(2)</sup>	3,5	1	12,5	15
C167.AS.451 <sup>(2)</sup>	C167.AD.451 <sup>(2)</sup>	4,5	1	15	18
C167.AS.501	C167.AD.501	5	1	18	21
C167.AS.601 <sup>(2)</sup>	C167.AD.601 <sup>(2)</sup>	6	1	19,5	23
C167.AS.602 <sup>(2)</sup>	C167.AD.602 <sup>(2)</sup>	6 (4+2)	2	21	24
C167.AS.802	C167.AD.802	8 (4+4)	2	30	35

<sup>(2)</sup> standard length

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.