



LED TECHNOLOGY

5000 sqm
Illuminated area



Rail
maintenance



Road
maintenance



Security



Outdoor
show



Special
events



Military
applications



Emergency

PLUG-IN Line



Operation: **POWER**

Inlet plug 16A - 230V

Outlet socket 16A - 230V

X-MAST


4x320W LED - 8,5M

T-ZERO_{PRO}

X-MAST

4x320W LED - 8,5M

T-ZERO^{PRO}

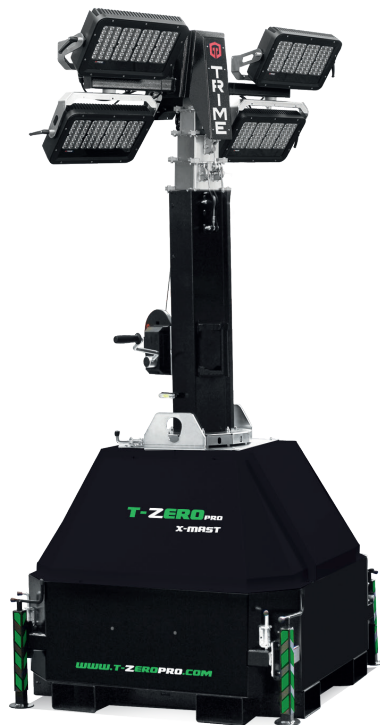

FEATURES

- Multi-directionally adjustable and tiltable floodlights
- 8,5 meters vertical tower, 340° rotatable
- **Manual lifting system by winch complete with auto-braking system**
- Galvanized metalworks
- 80 µm powder coating
- **Very compact dimensions, up to 22 units per truck**
- Sites forklift pockets
- Top and sides forklift pockets for effective handling
- Guided main coiled cable to avoid damage during tower operation
- Circuit breaker for electrical protection against overload
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- Inlet plug and outlet socket to connect in series more units

ZERO
emissions

ZERO
fuel costs

ZERO
noise

MINIMAL
service

EASY
handling & portability

LINKABLE TOWERS

5000 sqm
illuminated area

Complete SILENCE
on work time
8 HOURS A DAY
7 DAYS A WEEK

22 units per truck
VERY COMPACT dimensions

Dimensions & weight	Dimensions min (mm)			Dimensions max(mm)		Total weight (kg)	
	1100x1100x2650 (LxWxH)			2360x2360x8500 (LxWxH)		445	
Floodlights	Type	Power (each)	Floodlights number	IP level	Illuminated area (sqm)	Options	
	Led	320W	4	65	5000	Light sensor	
Mast	Lifting method		Max Height	Max Wind Speed		Rotation	
	Manual		8,5 m	110 km/h		340°	
Input&output	Inlet plug			Outlet socket			
	16A - 230V			16A - 230V			

TRIME
Lighting Towers



AMIN POWER ENERGY

+48 603 442 277
+48 691 442 270
Zielone Wzgórze 6, 67-210 Głogów
biuro@powerenergy.com.pl

