


C08

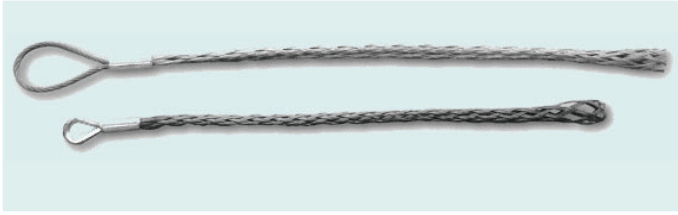

Dead end stocking for pulling underground cables.
Long stocking type art. C08.L also available.

| | Ø cable min - max | Length ⁽¹⁾ | Stocking length ⁽²⁾ | Breaking load |
|--------|----------------------|-----------------------|-----------------------------------|------------------|
| | mm | mm | mm | kg |
| C08.01 | 10-15 | 600 | 900 | 2000 |
| C08.02 | 15-20 | 600 | 900 | 2000 |
| C08.03 | 20-25 | 600 | 1000 | 2500 |
| C08.04 | 25-30 | 600 | 1200 | 3000 |
| C08.05 | 30-40 | 700 | 1500 | 4500 |
| C08.06 | 25-45 | 700 | 1500 | 5000 |
| C08.07 | 40-50 | 800 | 1500 | 5000 |
| C08.08 | 45-60 | 800 | 1600 | 5000 |
| C08.09 | 60-80 | 800 | 1800 | 8000 |
| C08.10 | 80-100 | 1000 | 2000 | 10000 |
| C08.11 | 100-140 | 1200 | 2000 | 10000 |
| C08.12 | 140-170 | 1200 | 2000 | 10000 |
| C08.13 | 170-200 | 1200 | 2000 | 10000 |

⁽¹⁾ standard stocking ⁽²⁾ longer type stocking art. C08.L

C09



Joining stocking for pulling underground cables.

| | Ø cable min - max | Length | Breaking load |
|--------|----------------------|--------|---------------|
| | mm | mm | kg |
| C09.01 | 10-15 | 1200 | 2000 |
| C09.02 | 15-20 | 1200 | 2000 |
| C09.03 | 20-25 | 1200 | 2500 |
| C09.04 | 25-30 | 1200 | 3000 |
| C09.05 | 30-40 | 1400 | 5000 |
| C09.06 | 25-45 | 1400 | 5000 |
| C09.07 | 40-50 | 1600 | 5000 |
| C09.08 | 45-60 | 1600 | 5000 |
| C09.09 | 60-80 | 1600 | 8000 |
| C09.10 | 80-100 | 2000 | 10000 |
| C09.11 | 100-140 | 2400 | 10000 |
| C09.12 | 140-170 | 2400 | 10000 |
| C09.13 | 170-200 | 2400 | 10000 |


C10



Double eye stocking for pulling underground cables.

| | Ø cable min - max | Length | Breaking load |
|--------|----------------------|--------|---------------|
| | mm | mm | kg |
| C10.01 | 10-15 | 800 | 2000 |
| C10.02 | 15-20 | 800 | 2000 |
| C10.03 | 20-25 | 800 | 2500 |
| C10.04 | 25-30 | 800 | 3000 |
| C10.05 | 30-40 | 1000 | 4500 |
| C10.06 | 25-45 | 1000 | 5000 |
| C10.07 | 40-50 | 1000 | 5000 |
| C10.08 | 45-60 | 1000 | 5000 |
| C10.09 | 60-80 | 1000 | 8000 |
| C10.10 | 80-100 | 1200 | 10000 |
| C10.11 | 100-140 | 1400 | 10000 |
| C10.12 | 140-170 | 1400 | 10000 |
| C10.13 | 170-200 | 1400 | 10000 |

C11

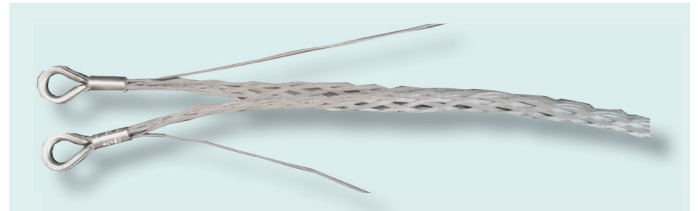

Double eye stocking with open sleeve for pulling underground cables.

| | Ø cable min - max | Length | Breaking load |
|--------|----------------------|--------|---------------|
| | mm | mm | kg |
| C11.01 | 10-15 | 800 | 2000 |
| C11.02 | 15-20 | 800 | 2000 |
| C11.03 | 20-25 | 800 | 2500 |
| C11.04 | 25-30 | 800 | 3000 |
| C11.05 | 30-40 | 1000 | 4500 |
| C11.06 | 25-45 | 1000 | 5000 |
| C11.07 | 40-50 | 1000 | 5000 |
| C11.08 | 45-60 | 1000 | 5000 |
| C11.09 | 60-80 | 1000 | 8000 |
| C11.10 | 80-100 | 1200 | 10000 |
| C11.11 | 100-140 | 1400 | 10000 |
| C11.12 | 140-170 | 1400 | 10000 |
| C11.13 | 170-200 | 1400 | 10000 |

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.